



The new generation  
of skid steer loaders.


**ELISE 900<sup>MK3</sup>**

first.green

Fully **electric**,  
noiseless,  
zero emission.



Cost **effective,**  
nearly no  
maintenance.

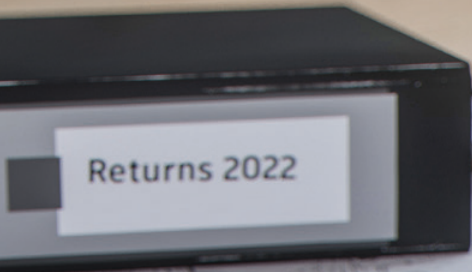



# Powered with technology.

**Elise 900.** The world's first electric skid steer loader represents the highest technology and years of experience of FIRSTGREEN Industries.



Battery endurance

**6+** hours

Dependant on use, conditions  
and configuration

Hinge pin height

**3637** mm

356mm higher reach than the  
competing average

Side tilt

**47°**

10° higher tilt angle  
than competing average



100% electric, extremely low noise, 0 emission

On stock in 3 days

Lithium battery available

Low operational costs

Retrofitable modular construction

Microspeed for precise control

Self-leveling gyro platform

Chassis clearance

**262** mm

44 mm higher  
than competing average

Remote control

**50** m

15 m with  
smart app

Loading capacity

**900** kg

1200 kg when using 400Ah  
capacity extended battery

# Technical specs.



## GENERAL SPECIFICATIONS

Rated load capacity	900 / 1 200 kg
Tipping load	1 800 / 2 400 kg
Minimum travel speed	0.15 km/h
Maximum speed	12 km/h
Maximum travel speed	12 km/h

## MOTOR

Electric engine type	3xGEW
Rated power	3x10 kW
Maximum power	3x27 kW
Maximum torque	3x120 Nm

## TUNE-UP YOUR MACHINE

### Options



- Windowless cabin re-build set
- Air conditioning
- Hard-mounted display
- Integrated charger for the extended battery option
- 3 phase charger, or twin 1 phase chargers
- Safety open door sensor
- Standard lead-acid battery with 240 Ah capacity
- Extended lead-acid battery with 400 Ah capacity
- Lithium battery options
- Rubber or steel track set for increased traction
- Cable set pre-install for electric attachments

### Standard features

- Rear-view camera
- Left and right rear-view mirror
- Mandatory lighting
- Front work light
- Rear work lights
- Orange beacon light
- Reversing alarm
- Off-road wheels
- Safety opening window
- Front roller sunshade
- Tinted glass
- Windshield wiper with sprayer
- Safety reinforced cab
- Seat with safety belt and operator detector system
- Quick coupler – SAE J2513
- ISO joystick control
- Vertical bucket stabilization system
- Electric heater
- Android smartphone with control app
- External battery charger
- User and maintenance manual

Compare technical specifications for this product online at **first.green**

**ELISE 900**

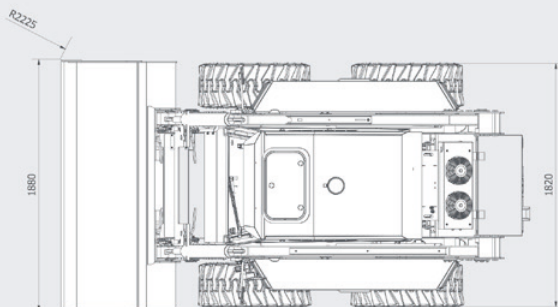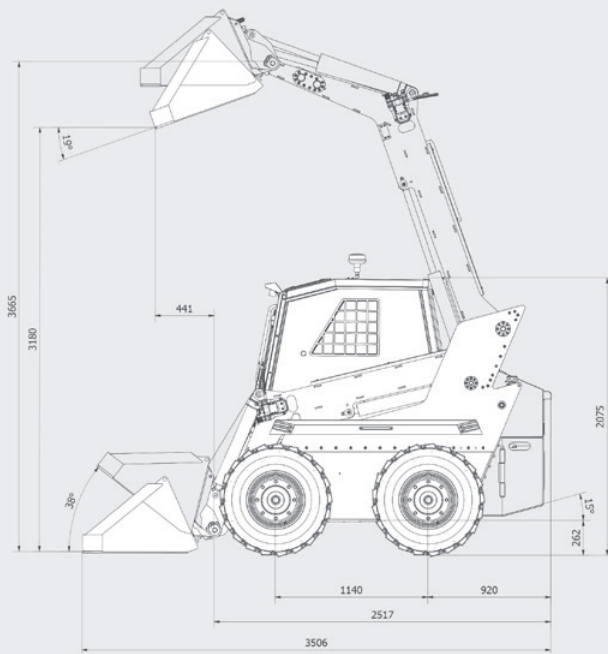

## WEIGHTS

Rated operating weight      3 300 / 3 800 kg

Total weight of the loader      4 200 / 5 000 kg

## HYDRAULICS

Hydraulic oil pressure      180 Bar

Hydraulic oil flow      65 l/min

Hydraulic oil reservoir      40 l



## Maintenance



## Logistics



## Construction



## Forestry



## Agriculture





# With a wide range of attachments.



Standard bucket



Concrete mixer




Pallet forks



Hammer



Auger



... plus 34 other attachments  
on [first.green](https://first.green)



For more FIRSTGREEN products, visit  
**first.green**

+420 737 633 733, [info@first.green](mailto:info@first.green)